Genie® GR-26J

Specifications

Models	GR-26J	
Measurements	**US**	**METRIC**
Working height max. - indoor(1)	31 ft 11 in	9.90 m
Working height max. - outdoor(1)	31 ft 11 in	9.90 m
Platform height max.- indoor	25 ft 11 in	7.90 m
Platform height max. - outdoor	25 ft 11 in	7.90 m
Horizontal reach max.	8 ft 8 in	2.65 m
Working horizontal reach max.	10 ft 3 in	3.15 m
Up-and-over clearance max.	21 ft 10 in	6.70 m
Ⓐ Platform length	2 ft 5.5 in	0.75 m
Ⓑ Platform width	2 ft 11 in	0.90 m
Toeboard Height	6 in	15 cm
Ⓒ Height - stowed	6 ft 6 in	1.99 m
Ⓓ Length- stowed	9 ft 3 in	2.82 m
Ⓔ Width	3 ft 3 in	0.99 m
Ⓕ Wheelbase	3 ft 11 in	1.2 m
Ⓖ Ground clearance (center)	4 in	10 cm
Productivity		
Maximum platform occupancy (in/out)	2/1	
Lift capacity	440 lb	200 kg
Lift capacity - extension deck extended	300 lb	136 kg
Vertical jib rotation	140°	
Turntable rotation	350°	
Drive speed - stowed	2.8 mph	4.5 km/h
Drive speed - raised	0.4 mph	0.65 km/h
Gradeability(2)	25 %	
Turning radius - inside	1 ft 11 in	59 cm
Turning radius - outside	6 ft 10 in	2.08 m
Lifting speed - raise/lower	54/40 sec	
Controls - proportional	24V DC	
Tires - Solid non-marking	16×5×11.25 in	40.5 cm
Power		
Power	24V (12×2V 250Ah)	
Hydraulic tank capacity	4.84 gal	22 L
Weight(3) and Floor Loading(4)		
Weight	5,842 lb	2,650 kg
Tire load max.	3,273 lb	1,485 kg
Occupied floor pressure	420 psf	2,054 kg/m2
Sound and Vibration Levels		
Sound Pressure level (ground workstation)	< 70 dBA	
Sound Pressure level (platform workstation)	< 70 dBA	
Vibrations	< 8 ft 2 in/s²	< 2.5 m/s²

Range of motion GR-26J

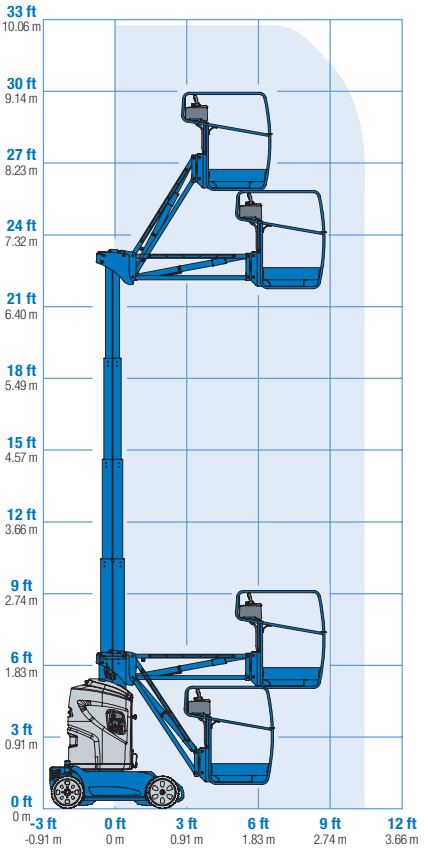

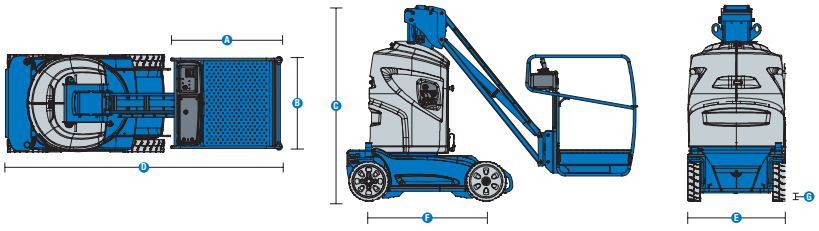

(1) The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
(2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.
(3) Weight refers to standard configuration and may vary depending on options and/or country standards.
(4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® GR-26J

SKU: Standard Model

- GR-26J*

* Build to Order

Option availability		S	S+	Bt0
Power	24V DC, twelve 2V batteries, 250Ah capacity			✔
Platform	Steel sliding mid-rail platform			✔
	Steel tube-in-tube mast system			✔
	AC power to platform			✔
	Auxiliary platform lowering			✔
	Platform load sense system			✔
	Proportional lift and drive			✔
Chassis	Flashing beacon			✔
	Descent, tilt, and motion alarm			✔
	Direct electric rear wheel drive			✔
	Drive enable system			✔
	Electric brake release			✔
	Fork pockets			✔
	Front wheel steer			✔
	Hour meter			✔
	On-board diagnostic system with battery charge indicator			✔
	Pothole protection			✔
	Reinforced ABS chassis covers			✔
	Solid non-marking tires			✔
	Tie-down attachment points			✔

S Standard
S+ Standard +
Bt0 Build to Order
✔ Standard Features
❍ Options

Indoor & Outdoor

Narrow Access

Proportional lift and drive

Genie Genuine Accessories(1)

- Lift Tools productivity tools
- Lift Connect Telematics subscription extension
- Tech Pro Link Connector

(1) More accessories available from Genie Genuine Parts.

Distributed by:

Equipinc AWP Sdn Bhd (1077085-A)
31, Jalan Serendah 26/39, i-Parc 2
Seksyen 26, 40400 Shah Alam, Selangor.
Tel: +(603) 5103 0939/ 5103 2685
Fax: +(603) 5103 2839
Mobile: +(6012) 639 2731 (Tan)
+(6012) 377 3571 (Zun)
Email: awpsales@equip-inc.com

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

09/22

© 2022 Terex Corporation