

Genie® GS™ -2669 DC, GS-3369 DC & GS-4069 DC

Specifications

Models	GS-2669 DC		GS-3369 DC		GS-4069 DC	
Measurements	US	Metric	US	Metric	US	Metric
Working height max. ⁽¹⁾	32ft 2in	10 m	38ft 8in	11.96 m	46ft 3in	14.30 m
A Platform height max.	26ft 2in	8 m	32ft 8in	9.96 m	40ft 3in	12.30 m
B Platform height - stowed	4ft 10in	1.47 m	4ft 10in	1.47 m	5ft 5in	1.65 m
C Platform length - outside	9ft 2in	2.79 m	9ft 2in	2.79 m	9ft 2in	2.79 m
Platform length - outside, extended	14ft 2in	4.32 m	14ft 2in	4.32 m	14ft 2in	4.32 m
Slide-out platform extension deck - length	5ft	1.52 m	5ft	1.52 m	5ft	1.52 m
D Platform width - outside	5ft 3in	1.60 m	5ft 3in	1.60 m	5ft 3in	1.60 m
Toeboard height	6in	15 cm	6in	15 cm	6in	15 cm
E Height - stowed (folding rails)	8ft 6in	2.59 m	8ft 6in	2.59 m	9ft	2.74 m
Height - stowed (rails lowered)	6ft 3.5in	1.92 m	6ft 3.5in	1.92 m	6ft 10in	2.08 m
F Length machine - stowed	10ft 3in	3.12 m	10ft 3in	3.12 m	10ft 3in	3.12 m
Length machine - stowed, extended	14ft 9.5in	4.50 m	14ft 9.5in	4.50 m	14ft 9.5in	4.50 m
Length machine - with outriggers	12ft 4in	3.76 m	12ft 4in	3.76 m	12ft 4in	3.76 m
G Width	5ft 9in	1.75 m	5ft 9in	1.75 m	5ft 9in	1.75 m
H Wheelbase	7ft 6in	2.29 m	7ft 6in	2.29 m	7ft 6in	2.29 m
I Ground clearance (center)	9.5in	24 cm	9.5in	24 cm	9.5in	24 cm

Productivity

	4/4		4/2		3/2	
Max. platform occupancy (in/out)						
Lift capacity	1,500 lb	680 kg	1,000 lb	454 kg	800 lb	363 kg
Lift capacity - extension deck extended	300 lb	136 kg	300 lb	136 kg	300 lb	136 kg
Max. platform drive height	26ft 2in	8 m	32ft 8in	9.96 m	40ft 3in	12.3 m
Drive speed - stowed	4.5 mph	7.2 km/h	4.5 mph	7.2 km/h	4.5 mph	7.2 km/h
Drive speed - raised	0.3 mph	0.5 km/h	0.3 mph	0.5 km/h	0.3 mph	0.5 km/h
Gradeability - stowed ⁽²⁾	35%		35%		35%	
Turning radius - inside/outside	83in/181.2in	2.11 m/4.6 m	83in/181.2in	2.11 m/4.6 m	83in/181.2in	2.11 m/4.6 m
Lifting speed - raise/lower	34/31 sec		39/29 sec		61/28 sec	
Tilt sensor activation (front to back/side to side)	3°/2°		3°/2°		3°/2°	
Max. outrigger leveling (front to back /side to side)	5.3°/11.7°		5.3°/11.7°		5.3°/11.7°	
Tires - Non-marking, rough terrain	12×26in	30×66 cm	12×26in	30×66 cm	12×26in	30×66 cm

Power




Power	48V DC (8×6V 315Ah)	48V DC (8×6V 315Ah)	48V DC (8×6V 315Ah)
Hydraulic tank capacity	18 gal	68.1 L	18 gal

Weight⁽³⁾ and Floor Loading⁽⁴⁾

Weight	7,946 lb	3,604 kg	7,687 lb	3,487 kg	10,948 lb	4,966 kg
Weight with outriggers	8,796 lb	3,990 kg	8,537 lb	3,873 kg	11,798 lb	5,352 kg
Tire load max.	3,334 lb	1,512 kg	3,199 lb	1,451 kg	3,752 lb	1,702 kg
Tire contact pressure	83.3 psi	575 kPa	80 psi	551 kPa	93.3 psi	643 kPa
Occupied floor pressure	184 psf	8.83 kPa	171 psf	8.19 kPa	221 psf	10.60 kPa

Sound and Vibration Levels

Sound Pressure level (ground workstation)	70 dBA		70 dBA		70 dBA	
Sound Pressure level (platform workstation)	79 dBA		79 dBA		79 dBA	
Vibrations	< 8 ft 2 in/s ²	< 2.5 m/s ²	< 8 ft 2 in/s ²	< 2.5 m/s ²	< 8 ft 2 in/s ²	< 2.5 m/s ²

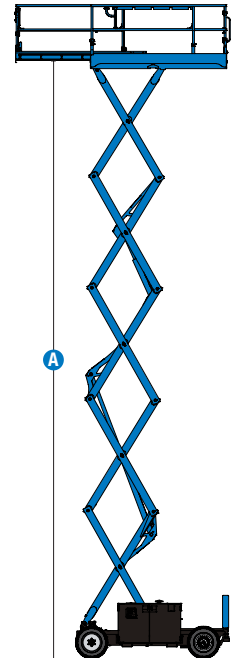

(1) The metric equivalent of working height adds 2m to platform height. US adds 6ft to platform height.
 (2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.
 (3) Weight refers to standard configuration and may vary depending on options and/or country standards.
 (4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

Genie® GS™ -2669 DC, GS-3369 DC & GS-4069 DC

SKU: Standard Model

- GS-2669 DC*
- GS-3369 DC*
- GS-4069 DC*

* Build to Order

Option availability		S	S+	BtO
Power	Standard FLA flooded lead acid batteries			✓
	High capacity DC battery (Standard on GS-4069 DC)			○
	Power inverter			○
	48V DC drive system			✓
Platform	Folding rails, Full-height swing gate			✓
	Single slide-out extension deck			✓
	Air line to platform			○
	AC power to platform			✓
	Diamond plate platform deck			✓
	Electronic horn			✓
	Lanyard attachment points			✓
	Platform control guard (PCON)			✓
	Platform load sense system			✓
	Proportional drive and lift			✓
	Self-closing entry gate			✓
	SmartLink dual zone control system			✓
	Chassis	Lift Connect Telematics		
Lift Connect with Access Manager upgrade				○
High floatation, foam-filled, non-marking tires				○
Rough Terrain, foam-filled, non-marking tires				✓
Auto leveling hydraulic outriggers				○
2 wheel drive				✓
Active oscillating axle				✓
Descent, tilt and motion alarm				✓
Dual LED flashing beacons				✓
Dual wheel multi-disc brakes				✓
On-board diagnostic system with battery charge indicator				✓
Rear axle sealed AC drive motors				✓
Tech Pro Link connector			✓	

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options



Rough Terrain Capabilities



Full Height Drive



Sealed AC Drive Motors



Distributed By:



Equipinc AWP Sdn Bhd (1077085-A)

31, Jalan Serendah 26/39, i-Parc 2 Seksyen 26,
40400 Shah Alam, Selangor.
T +(603) 5103 0939/ 5103 2685
F +(603) 5103 2839
H/P +(6012) 377 3571 (Zun), +(6012) 639 2731 (Tan)
E awpsales@equip-inc.com

Genie Genuine Accessories⁽¹⁾

- Lift Tools Productivity Tools
- Lift Connect Telematics
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.